



CUPERTINO SANITARY DISTRICT

SANTA CLARA COUNTY

BOARD OF DIRECTORS

DISTRICT MANAGER-ENGINEER

MARK THOMAS & CO. INC.

DISTRICT COUNSEL

ATKINSON • FARASYN, LLP

20065 STEVENS CREEK BOULEVARD, BLDG. C

CUPERTINO, CA 95014-2350

PHONE (408) 253-7071 • FAX (408) 253-5173

WENDELL H. KERR, JR., PRESIDENT

CURTIS B. HARRISON, SECRETARY

JOHN M. GATTO

DR. JOSEPH F. BROWN

WILLIAM A. BOSWORTH

Fall, 2003

Resident/Owner

Your property is served by the Cupertino Sanitary District. As a condition for connection to the District sewer main, a sewage backflow prevention device is required on your house lateral.

The property owner is solely responsible for the testing, maintenance and upkeep of the sewage backflow prevention device. If your sewage backflow prevention device has not been maintained, has been damaged or buried, sewage from the District main could flow backwards up the house lateral and into your home. The District is not responsible for any damage and associated costs resulting from inoperable sewage backflow prevention devices.

Call your plumber immediately if you cannot locate or are not confident that your sewage backflow prevention device is in good working condition.

Very truly yours,

MARK THOMAS & COMPANY, INC.


District Manager-Engineer

David E. Ross

DER/CHB

Enclosure: Sanitary Sewer Exhibit


TYPICAL CLEANOUT FOR LATERAL SEWER

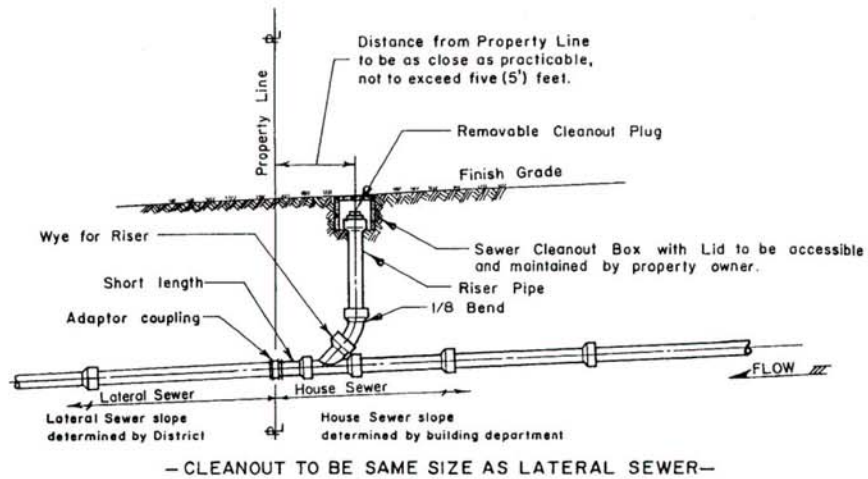

Notes:

1. Distance from the property line not to exceed five (5') feet.
2. Property Line Cleanout, Lateral Sewer Cleanout, to be same size as Lateral.
3. The maintenance of the Lateral Sewer Cleanout is the responsibility of the Property Owner.
4. House sewer minimum slope determined by local Building Department plumbing code requirements of the agency having jurisdiction thereover.

TYPICAL BACKFLOW PROTECTIVE DEVICE INSTALLATION

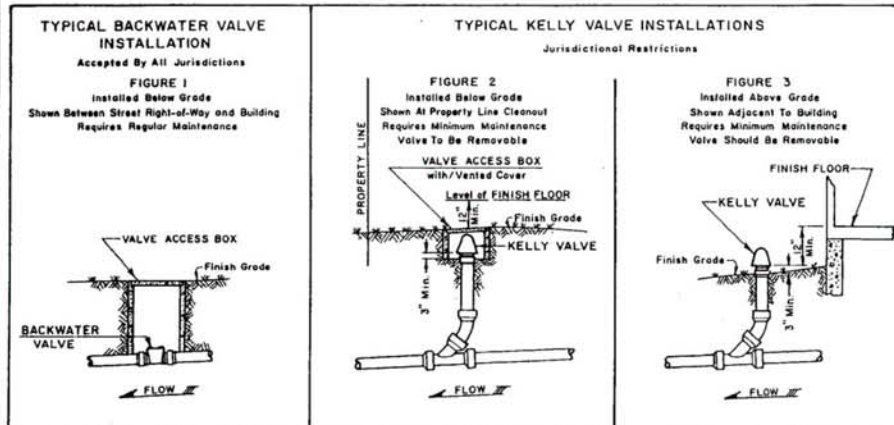

Notes:

1. The Backflow protective device to be located on site in the house sewer.
2. The type, location and installation of the Backflow Protective Device shall comply with the local Building Department plumbing code requirements of the agency having jurisdiction thereover.
3. Device to be accessible and maintained by the Property Owner.
4. If a Kelly Valve is installed at Property Line, it is to be readily removable for Lateral Sewer Maintenance.